
A floating flaperon is in very few archived sub-metre scenes, except at the Réunion find site

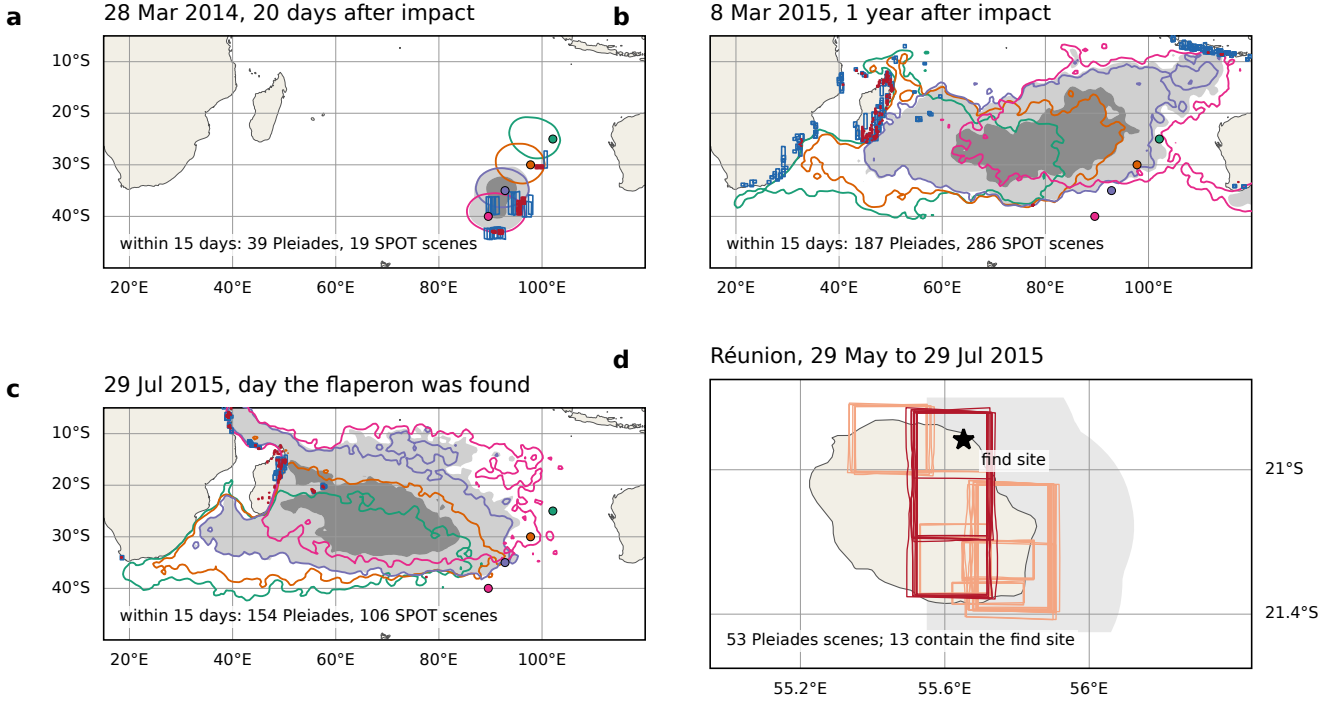

(i) The grey areas show where the flaperon could be afloat on each date. The coloured lines show the same for four start points on the 7th arc (dots). Red and blue outlines are archived satellite pictures taken within 15 days of the date. Each picture covers a very small part of the area. Near Réunion, many pictures show the beach where the flaperon was found.

(ii) Drift: existing 4-snapshot per-particle ensembles (snapshot harness on the remote machine, aus160 configurations; GLORYS12 + ERA5 and GlobCurrent + ERA5; flaperon class: wind factor 0.012 plus leeway 0.10 ± 0.03 m/s at 0-30 deg left of wind; 33,336 particles per start point per model; release 8 Mar 2014 00:19:37 UTC). Snapshots exist only at 8 Mar 2015 and 29 Jul 2015 inside the window, so positions on other dates come from a per-particle Brownian bridge (K = 1e4 m2/s, 25 km kernel floor); panel a rests entirely on the bridge and is provisional. Grey regions weight the start points by the run J impact-latitude posterior mapped to 25/30/35/40 S (0.009/0.028/0.573/0.390); both ocean models pooled with equal weight. Scenes: Airbus OneAtlas archive (Pleiades 0.7 m native, 0.5 m product; SPOT-6/7 1.5 m), queried anonymously 20 Oct 2026; time from product identifier. Medium-resolution scenes (Landsat, ASTER, Sentinel-1/2) are not drawn: they cannot resolve the object. Find site: Étang de Bois Rouge coast, 20.917 S 55.652 E. Coastline: Natural Earth 50 m / 10 m.